



Rethink

# SoundMasking



cambridge<sup>™</sup>  
SOUND MANAGEMENT

increase privacy

reduce distractions

"...the system has exceeded expectations."

"...empowers our employees to deliver exceptional service."

By adding a Qt Quiet Technology sound masking system, we were able to create the most **collaborative & efficient workspace.**

"...effectively masks several distracting conversations."

"We've seen healthy improvement in productivity..."

"I wouldn't open a call center without it."

enhance productivity


improve performance

# introduction

## who are we?

Cambridge Sound Management, LLC (CSM) offers innovative, simple and intelligently engineered solutions to the problems of privacy and acoustic distractions. Our Qt Quiet Technology sound masking systems combine exceptional audio performance, low impact installation, and affordability. Qt™ systems consume less than 24 watts of power per 72,000 square feet (6,689 m<sup>2</sup>), is GreenSpec listed, and can contribute to your LEED Certification. CSM has a distinguished heritage in the field of acoustics

as a descendant of the highly regarded Bolt, Beranek and Newman's acoustics consulting group that was founded in 1948. This group of distinguished acousticians received the American Institute of Architects Honor Award as recognition for having "...created an awareness of acoustical considerations in building design... and integrating solutions based on scientific principles with architectural and artistic concepts."

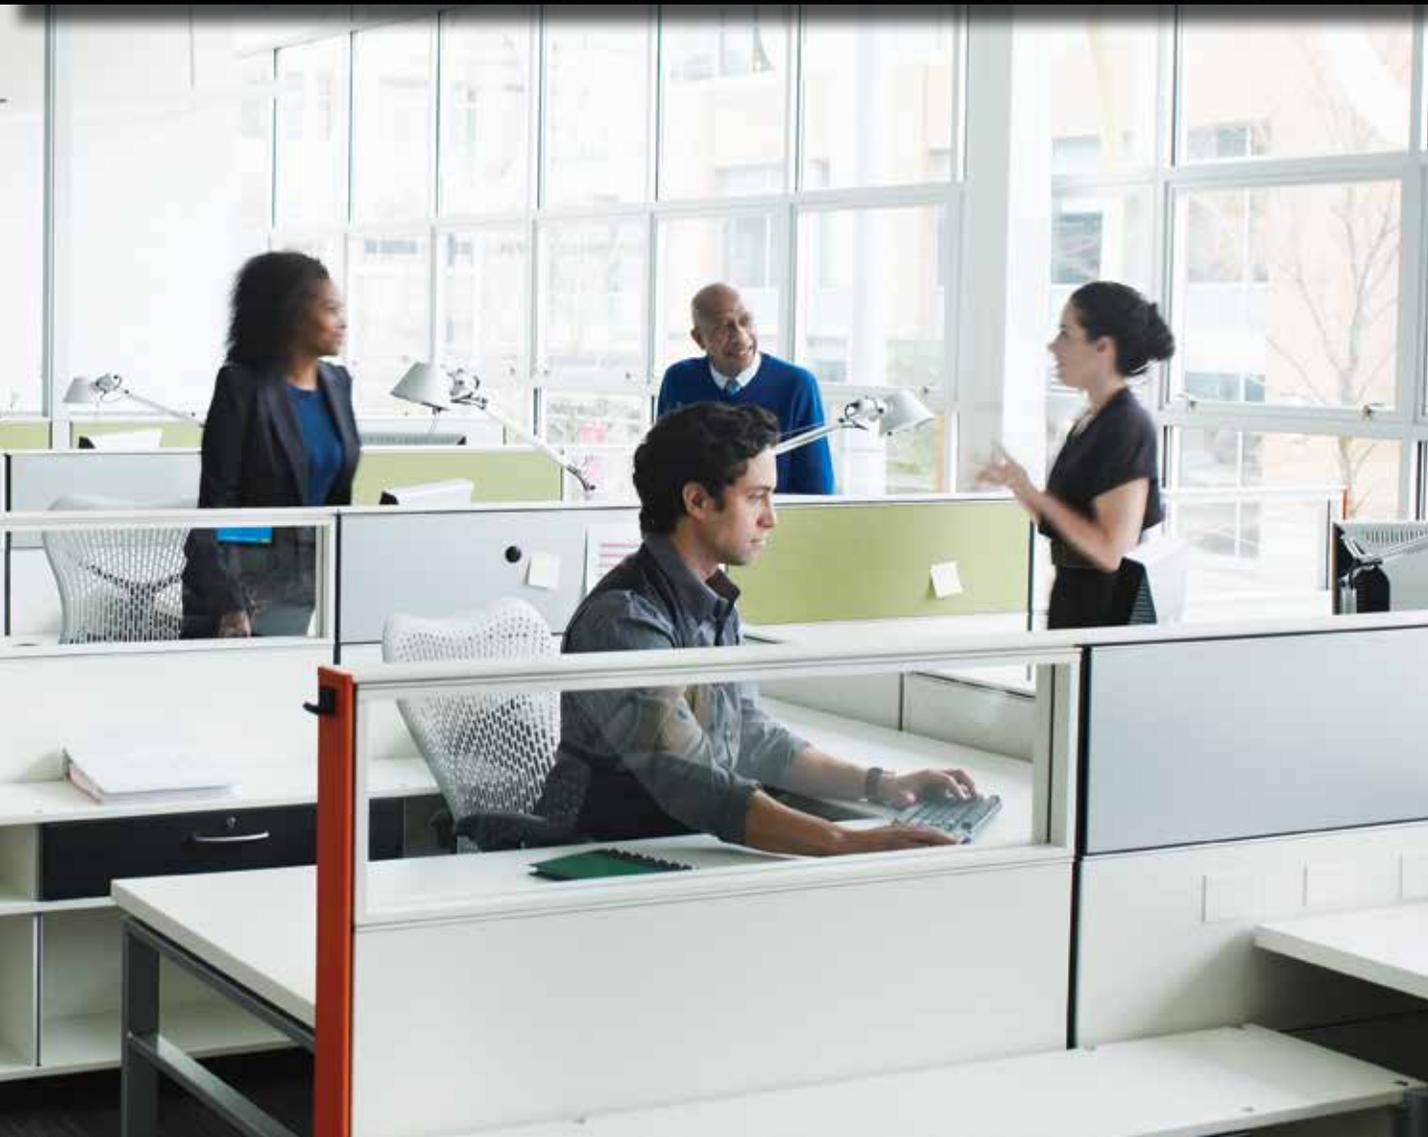

## contents

<b>sound masking 101</b>	<b>3</b>
why worry about acoustics?	
what is sound masking?	
how effective is sound masking?	
who uses sound masking?	
<b>rethink sound masking</b>	<b>7</b>
our direct field approach	
<b>Qt Quiet Technology</b>	<b>9</b>
Qt 100	
Qt 200	
Qt 600	
system comparison	
Qt emitters	
<b>our customers</b>	<b>17</b>
praise for the Qt system	

# sound masking 101

why worry about acoustics?

## workplace dissatisfaction

workers are least satisfied with speech privacy

This chart displays the results from a 2012 General Services Administration's (GSA) workplace research survey.

Results from this research study show that acoustic problems are a leading source of employee dissatisfaction in open offices.

Survey participants responded that they did not feel they could have private conversations in their working environment and that this caused more workplace dissatisfaction than office layout, furnishings and even temperature.

General Satisfaction / Maintenance

Extremely Dissatisfied



Extremely Satisfied

Office Layout



Office Furnishings



Thermal Comfort




Speech Privacy



## speech distractions

diminished worker performance

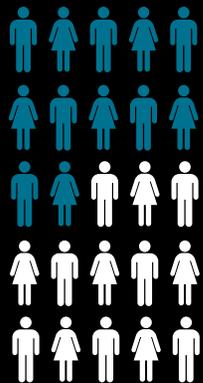

48%

In a recent research survey, 689 employees from 11 companies ranging from call centers to general corporate offices were surveyed regarding workplace comfort.

Researchers found that 48% of participants reported speech as the most distracting source of noise.

These disturbances lead to an increase in clerical mistakes, translating to possible financial or legal issues for the company.

## waste of time

lower productivity




During the same survey, researchers found that workers lost an average of 21.5 minutes each day to conversational distractions, making speech distractions the number one cause of reduced productivity.

This 5% of lost time each day can equate to significant financial losses in wasted productivity for companies each year.

## ABCs of acoustics

creating the optimal acoustic environment

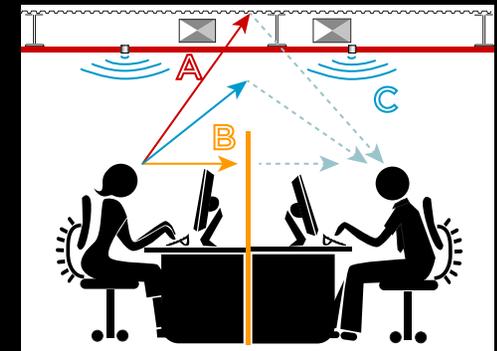

When designing an optimal acoustic environment, consultants typically consider a variety of elements referred to as the ABCs of acoustic design. In an ideal environment, the design elements would Absorb, Block, and Cover sound. Consultants balance these elements to reduce conversational distractions while designing an open, aesthetically pleasing office.

Today's offices feature smaller workstations, open office layouts and more reflective surfaces like glass and brick. At the same time, companies increasingly depend on information sharing and effective collaboration to maintain a competitive edge. This challenging environment demands both good acoustic design and the use of sound masking technology to ensure staff and customer comfort.

# sound masking 101

what is sound masking?



Just as the stars on a dark clear night can be easily seen, many private conversations in the workplace can be easily overheard and understood. As the ambient light increases, the stars appear to fade. Similarly, workplace conversations fade when the ambient sound in the room increases.

scan to learn more!



**S**ound masking is found in the “cover” portion of the ABCs of acoustics. Sound masking is the addition of an uniform background sound, similar to airflow, to reduce the intelligibility of human speech. The resulting environment leads to increased privacy, improved worker performance, enhanced productivity and greater worker comfort.

The privacy index measures the ability of a listener to understand words from someone not intending to be conversing with the listener. The higher the privacy index, the more confidential the talker’s conversation becomes.

The privacy index goal is 80% for open office areas and 95% for private offices. The addition

of sound masking helps organizations achieve these speech privacy goals.

When someone’s conversation is clearly understood, the speech becomes a distraction and the individual speaking has less privacy. The Qt Quiet Technology sound masking system is designed to increase the room’s ambient sound,

making the talker’s voice less intelligible.

As the ambient sound in the room increases, it becomes more challenging to discern an individual’s conversation from across the room. This inability to understand the conversation reduces distractions and increases the talker’s speech privacy.

# sound masking 101

how effective is sound masking?

## increased speech privacy

sound masking is a cost effective way to boost speech privacy

This table shows the effectiveness of common types of acoustical treatments. In this example, increases in ceiling tile quality relates to increased absorption, taller cubicle partitions relates to increased blocking, and the implementation of direct field sound masking relates to the increased coverage. The office environment in this example features 8' ceilings and 10'x10' cubicles.

After implementation, *direct-field sound masking is the most effective and budget friendly solution* for delivering increased speech privacy while reducing conversational distractions.

To learn more or to experiment with a variety of office environments, view our speech privacy calculator at: [www.csmqt.com/learn/speech-privacy-calc](http://www.csmqt.com/learn/speech-privacy-calc)

Acoustic Environment	sound masking	partition height	ceiling tiles (NRC rating)	avg. privacy index (%)	avg. cost
Typical Office	no	48"	.50	58.83	-
Increased Absorption	no	48"	.95	73.79	\$\$
Increased Blocking	no	80"	.50	81.50	\$\$\$
Increased Coverage	Yes	48"	.50	87.25	\$

## improved worker performance

reduced distraction and increased comfort lead to improved results




In a series of laboratory experiments conducted between 2006 and 2008, researchers examined the effect of speech intelligibility on task performance. This two-year study measured participants' short-term memory recall in a typical open office environment without sound masking versus the same environment with sound masking deployed. The researchers found an 8.7% increase in the participants' ability to recall a series of numbers and a 7.8% increase in recollection of words in the environment with sound masking.

Reduced distractions not only equate to improved worker performance, it also translates into an increase in productivity and less wasted time.



# Applications

- Call centers
- Counseling offices
- Courtrooms
- Hotel guest rooms
- Houses of worship
- Law enforcement
- Libraries
- Open office areas
- Patient rooms
- Pharmacies
- Private offices
- Research laboratories
- Retail banks
- Secured facilities
- Spas
- Waiting rooms

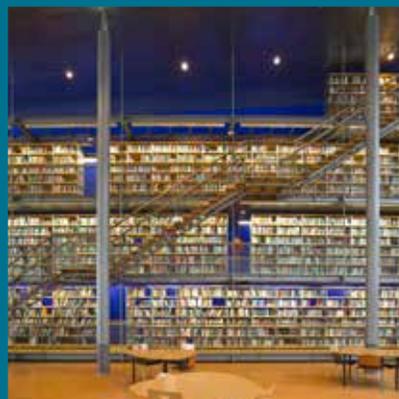


# who uses sound masking?



## Industries

- Corporate
- Healthcare
- Finance
- Government & Military
- Education
- Legal
- Retail
- Hospitality
- Venues & Events

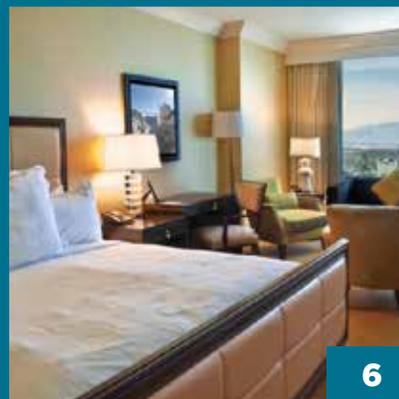

# rethink sound masking

## our direct field approach


**W**e created and patented our direct field system to remove the unknowns that can make in-plenum system design and installation so challenging.

Our Qt Quiet Technology™ system places the emitters (loudspeakers) in the ceiling and aims the masking sound directly into the space. This simple approach results in better performance, precise coverage, and improved energy efficiency, all with less effort.

And most importantly, our direct field system provides a more comfortable environment for those working in the space.

## patented four channel distribution

Qt emitters provide uniform spatial coverage with four uncorrelated channels, eliminating acoustic interference and the need for complicated design and tuning.

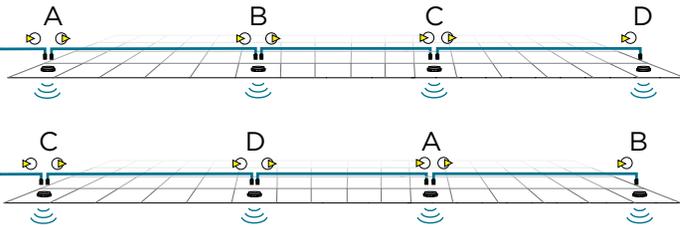



## simple layout, zoning and installation

The Qt system is designed to meet the unique acoustic requirements of a space, whether large or small. Qt emitters are easily installed on a simple grid pattern, determined by ceiling height. The versatile Qt emitters are capable of being mounted to a variety of ceiling types. Emitters are interconnected using pre terminated plenum rated category 3 cables.

During the layout and design phase, the space is divided into zones based on acoustic requirements of the space. Zones can range from 100 square feet (9.3 m<sup>2</sup>) to 12,000 square feet (1,115 m<sup>2</sup>). In this example, the office space is separated into three zones, allowing for different volume levels for each unique space.


- Zone 1: Open Office
- Zone 2: Hallway
- Zone 3: Private Offices

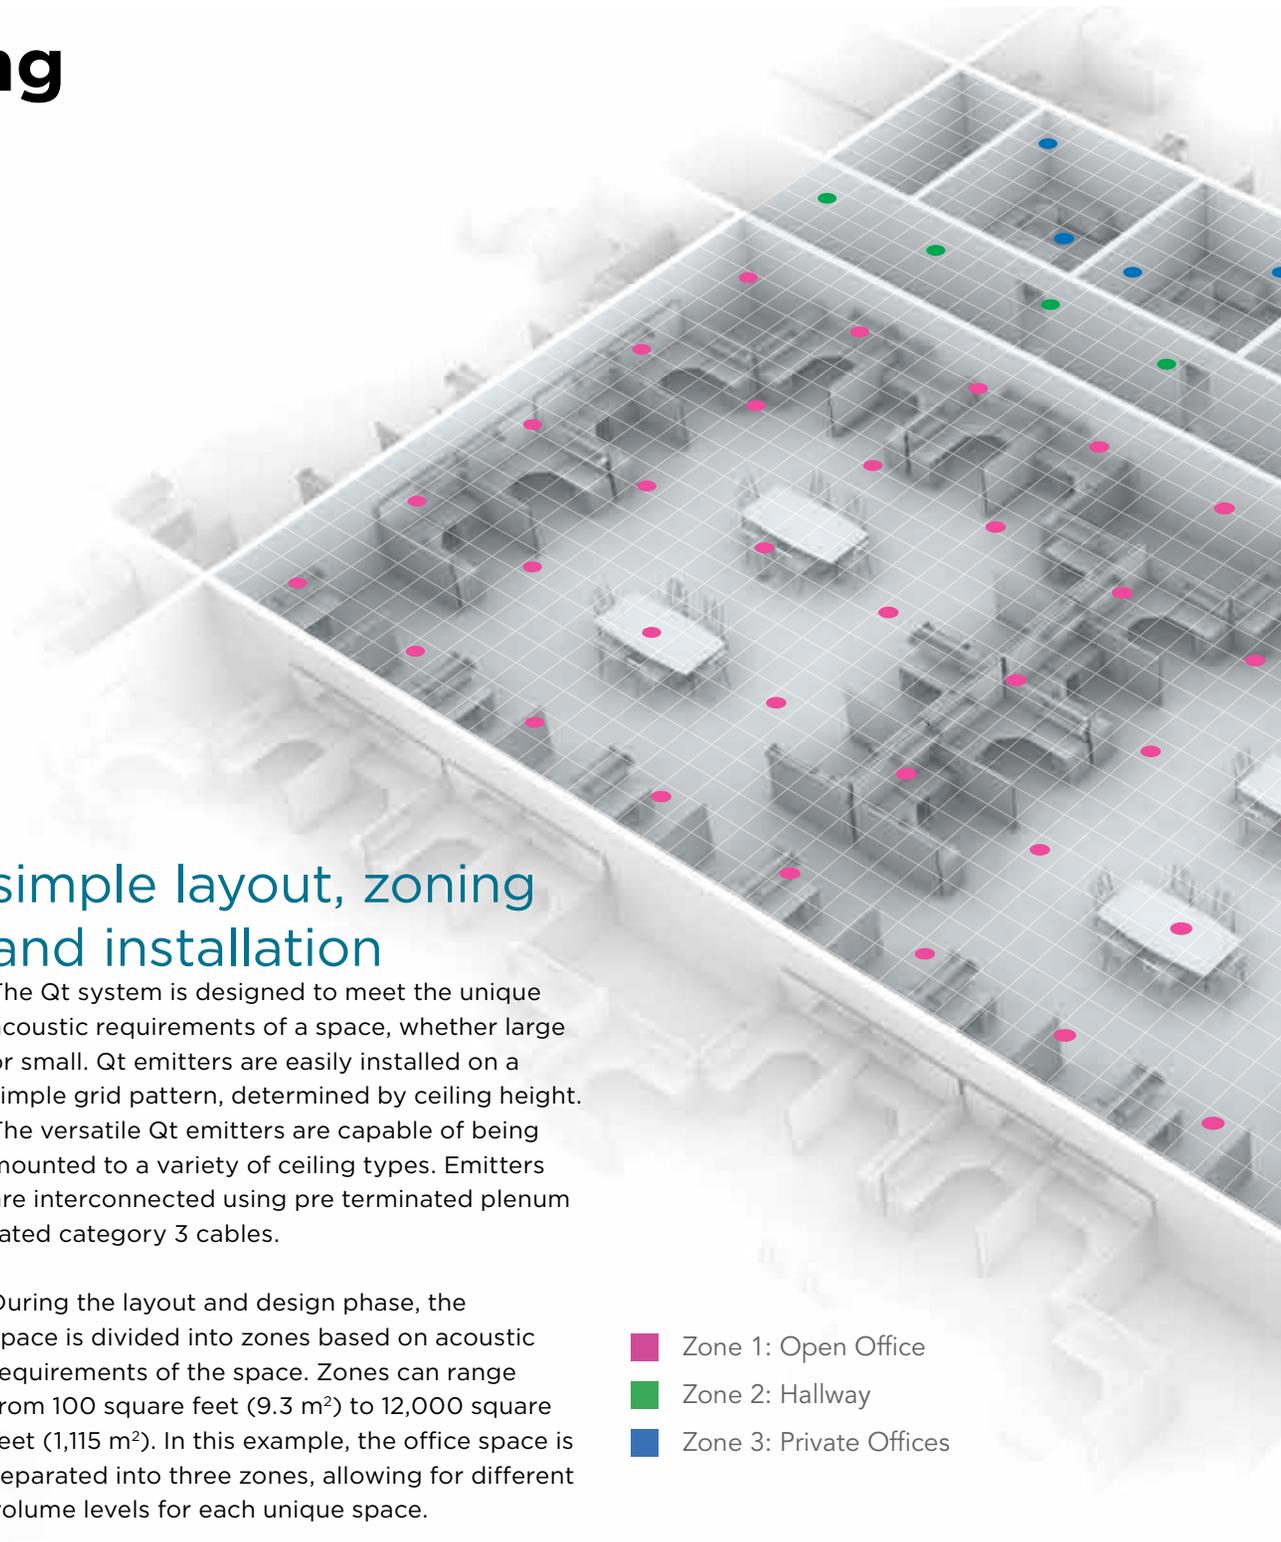

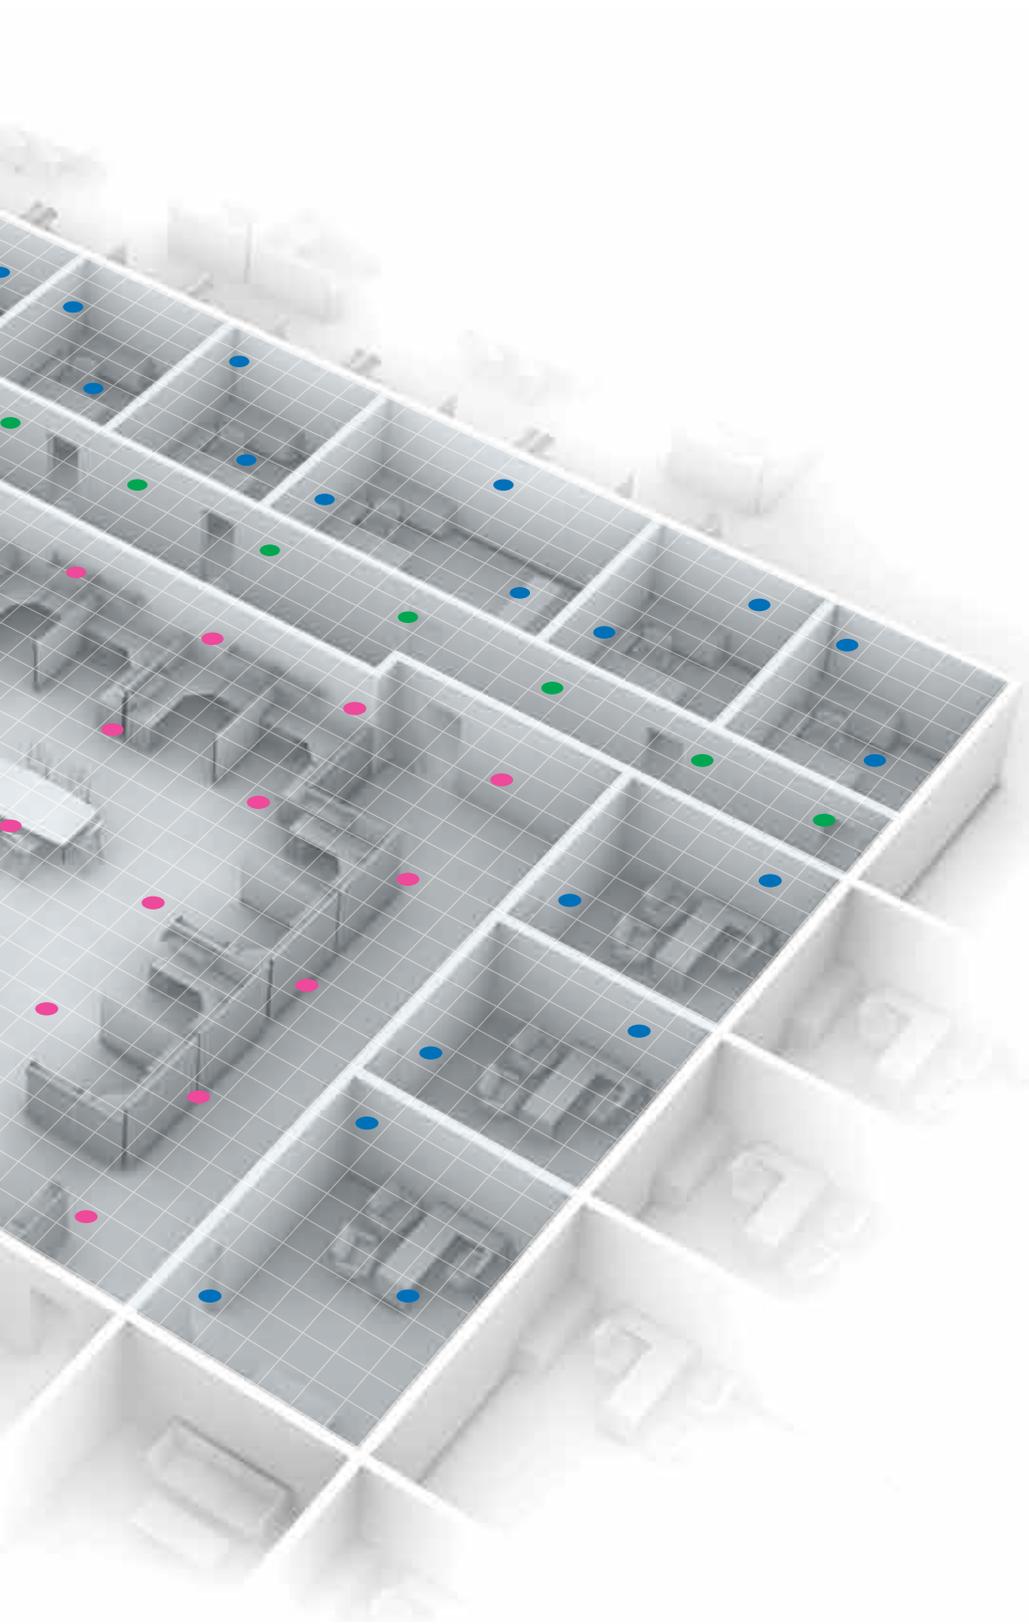


# precise, uniform sound masking

## how do traditional solutions stack up against the Qt sound masking system?

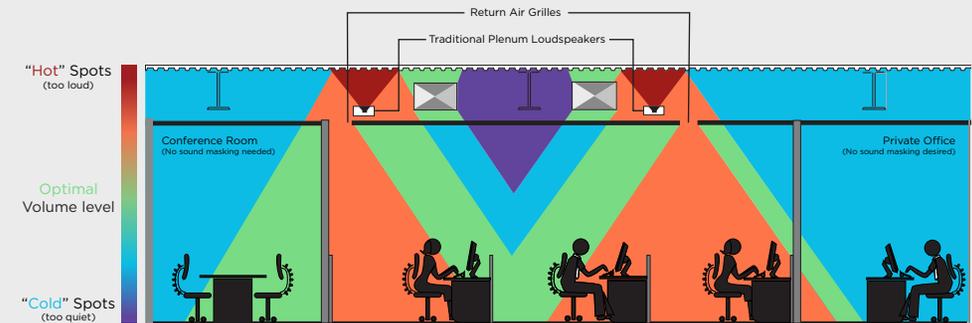

traditional sound masking system

Traditional sound masking systems, known as “in-plenum,” use large paint can-like loudspeakers installed above the ceiling tiles. Sound is bounced off the ceiling deck, through the ceiling material into the workspace below. The sound from these systems can be unpredictable and create “hot” and “cold” spots. Masking sound can easily overflow into undesired spaces. In-plenum systems require significant design, installation and tuning time because there are many unknowns above the ceiling. If no ceiling exists, there is no plenum for traditional systems to operate within, significantly impacting performance. Additionally, these systems require significantly more power to operate than a Qt system.

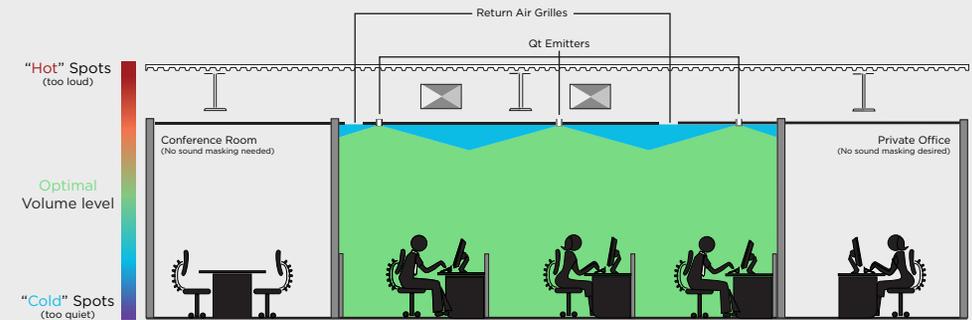

Qt Quiet Technology sound masking system

With the direct field approach to sound masking, the Qt™ system uniformly disperses the masking sound into the space and eliminates masking sound overflow into undesired areas. The pre-tuned masking sound is emitted through four sequenced channels that eliminate acoustic interference. Additionally, our Qt™ systems deliver more energy in the octave bands that are related to speech, resulting in a more energy efficient system that successfully masks speech at lower volume levels.

# Qt Quiet Technology™

sound masking systems

Cambridge Sound Management offers a variety of products to enhance the acoustic environment in any type of space. Our Qt Quiet Technology™ sound masking systems enhance privacy and reduce distractions in virtually any space from small offices to large, multi-floor buildings. Qt™ systems integrate paging and music functionality, making this 3-in-1 system a complete solution for creating better acoustic environments.

## advantages of the Qt Quiet Technology sound masking system:

### precise control

Qt™ systems provide precise control over where the masking sound is emitted. This means that sound masking is dispersed only in the spaces in which it is needed, eliminating unwanted spill over into adjacent spaces.

### uniform and comfortable

The Qt system provides a uniform blanket of sound coverage throughout the workspace and is unaffected by ceiling design and the many obstructions that often litter the plenum. The sound is transmitted as four uncorrelated channels, creating a more pleasant and comfortable masking sound.

### versatile

Qt emitters can be installed into any workspace, no matter what type of ceiling is present. The system is designed to grow and change with your business. Qt emitters can be moved and reconfigured with minimal effort and impact when your workspace changes.

### simple, low impact installation

Qt emitters are installed along a simple grid pattern with space determined by ceiling height. In new construction or in existing space, emitters can be installed rapidly and with low impact to the surroundings and little to no down-time for the business.

### energy efficient

The Qt system is the most environmentally friendly sound masking system on the market. All Qt systems are GreenSpec listed and can contribute to LEED certification scores by improving the acoustic environment and mitigating acoustic challenges created by other LEED requirements (i.e. daylight & outdoor views).

### pre tuned, saving valuable time & money

Each Qt system comes pre-tuned with our masking spectrum, specifically calibrated to efficiently mask the frequencies most commonly associated with the human voice.



Qt Quiet Technology™ sound masking systems enhance privacy and reduce distractions in virtually any space from small offices to large, multi-floor buildings. Combined with integrated paging and music functionality, Qt systems are a complete 3-in-1 solution for creating better acoustic environments.


# key features

- 1 zone, 120 emitters
- 1 audio input for paging or music
- integrates with emergency paging systems
- front panel control with LCD
- panel lock (software)
- auto ramping
- four uncorrelated masking channels
- iOS configuration app



# Qt 100 control module

The Qt 100 is ideal for smaller, single zone spaces of up to 12,000 square feet (1,115 m<sup>2</sup>).

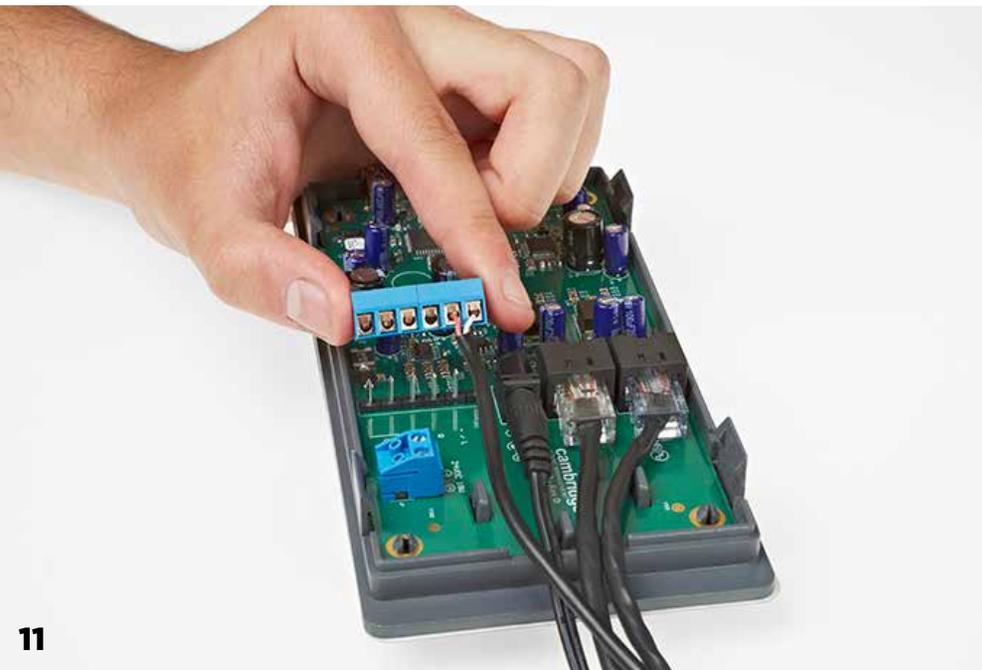

## technical specifications

- **dimensions (WxHxD):**  
7" x 3.5" x 0.875" (17.8 cm x 8.9 cm x 2.3 cm)
- **weight:**  
6 oz (170 g)
- **max. power output:**  
7 total watts max
- **frequency response:**  
sound masking: 200 Hz to 5 kHz, 1/3<sup>rd</sup> OBs  
paging & music: 200 Hz to 12.8 kHz, OBs
- **channels:**  
automatic 4 uncorrelated channel distribution
- **auxiliary audio inputs**  
10,000 ohms, line level input (2V max)
- **integrated digital compression:**  
performed via DSP

## standards & certifications

- **ASTM E1130**
- **GreenSpec Listed**
- **UL 60065 compliant**
- **CE compliant**
- **FCC compliant**
- **RoHS compliant**

## key features

- up to 2 zones, 240 emitters
- 1 audio input for paging or music
- front panel control with LCD
- panel lock (hardware)
- four uncorrelated masking channels
- equipment rack mount available



The Qt 200 is ideal for medium sized, one or two zone spaces of up to 24,000 square feet (2,230 m<sup>2</sup>).



# Qt 200

control module

## standards & certifications

- ASTM E1130
- GreenSpec Listed
- UL 60065 compliant
- CE compliant
- FCC compliant
- RoHS compliant


## technical specifications

- **dimensions (WxHxD):**  
11" x 3.5" x 3.8" (27.9 cm x 8.9 cm x 9.7 cm)
- **weight:**  
1.5 lbs (680 g)
- **max. power output:**  
2 watts max per zone, 4 total watts max
- **frequency response:**  
sound masking: 200 Hz to 5 kHz, 1/3<sup>rd</sup> OBs  
paging & music: 200 Hz to 12.8 kHz, OBs
- **channels:**  
automatic 4 uncorrelated channel distribution
- **auxiliary audio inputs**  
5,000 ohms, line level input (2V max)
- **integrated digital compression:**  
performed via DSP



## key features

- up to 6 zones, 120 emitters per zone
- 2 audio inputs for paging and music
- integrates with emergency paging systems
- front panel with LCD or browser-based software control
- panel lock (hardware)
- auto ramping
- time-of-day scheduling
- adjustable equalizer for masking and audio inputs
- four uncorrelated masking channels
- system monitoring and fault detection
- built-in clock with battery backup
- equipment rack mount available

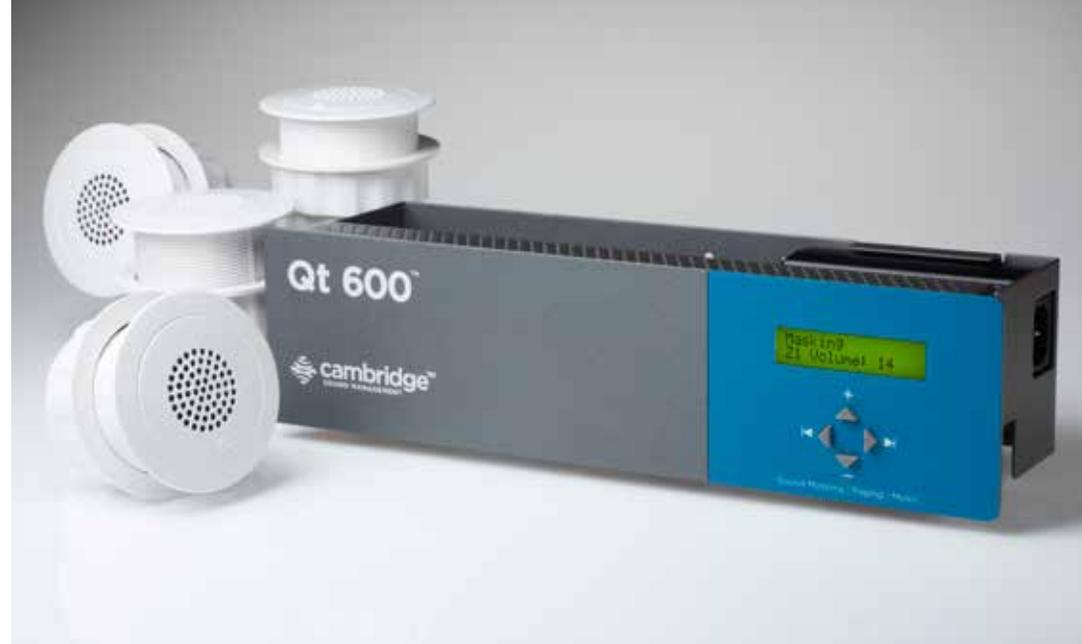

# Qt 600

## control module

The Qt 600 is ideal for medium to large multi-zone spaces of up to 72,000 square feet (6,689 m<sup>2</sup>). This system includes monitoring and control software for controlling the module via a TCP/IP connection.



## technical specifications

- **dimensions (WxHxD):**  
13.5" x 3.5" x 3.8" (34.3 cm x 8.9 cm x 9.7 cm)
- **weight:**  
3 lbs (1.4 kg)
- **max. power output:**  
2 watts max per zone, 12 total watts max
- **frequency response:**  
sound masking: 200 Hz to 5 kHz, 1/3<sup>rd</sup> OBs  
paging & music: 200 Hz to 12.8 kHz, OBs
- **channels:**  
automatic 4 uncorrelated channel distribution
- **auxiliary audio inputs**  
5,000 ohms, line level input (2V max)
- **integrated digital compression:**  
performed via DSP

## standards & certifications

- **ASTM E1130**
- **GreenSpec Listed**
- **UL 60065 compliant**
- **CE compliant**
- **FCC compliant**
- **RoHS compliant**

# Qt Quiet Technology

system comparison



	Qt 100	Qt 200	Qt 600
<b>capacity</b>			
zones	1	2	6
speakers (max)	120	240	720
coverage area (max)	12,000 ft <sup>2</sup> (1,115 m <sup>2</sup> )	24,000 ft <sup>2</sup> (2,230 m <sup>2</sup> )	72,000 ft <sup>2</sup> (6,689 m <sup>2</sup> )
<b>specifications</b>			
audio inputs	1	1	2
mounting	wall	wall or rack	wall or rack
panel lock	software	hardware	hardware
internal clock	no	no	yes
dimensions	7" x 3.5" x 0.875" (17.8 cm x 8.9 cm x 2.3 cm)	11.5" x 3.5" x 3.8" (27.9 cm x 8.9 cm x 9.7 cm)	13.5" x 3.5" x 3.8" (34.3 cm x 8.9 cm x 9.7 cm)
weight	6 oz (170 g)	1.5 lbs (680 g)	3 lbs (1.4 kg)
<b>control</b>			
front panel	yes	yes	yes
software	no	no	yes
TCP/IP access	no	no	yes
volume	by zone & input	by zone & input	by zone & input
spectrum	no	no	by zone & input
passwords	no	no	yes - 2 level
<b>features</b>			
day/night levels	no	no	by zone
day/night ramping	no	no	by zone
auto ramping	yes	no	by zone
system monitoring	no	no	electronics and emitters
email notification	no	no	yes
emergency paging integration	yes	no	yes

# Qt emitters

the backbone of the Qt system

Qt emitters use four uncorrelated channels to eliminate acoustic interference.

Included with each Qt emitter is a 16' (4.9 m) CAT-3 cable pre-terminated with RJ-45 connectors.

Qt emitters are plenum rated, UL-listed and comply with UL 2043.

Dip switches on the adjustable emitter reduce the volume level up to 9 dB in 3 dB decrements, for easy micro zoning.

Qt emitters feature small 1.5" (3.8 cm) drivers in direct field enclosures, allowing for a wide sound dispersion.

Qt emitters are small, wide dispersion direct field speakers. The plug and play emitters may be used interchangeably with all Qt Quiet Technology sound masking systems.

refinements and micro-zoning. The dip switches can decrease the volume level of each emitter by up to 9 dB in 3 dB decrements to compensate for different acoustic conditions within a zone. Qt emitters can provide micro zoning down to 100 square feet (9.3 m<sup>2</sup>) of space.

Qt emitters include volume adjustable dip switches for post installation





# Qt™ emitters

mounting options and color caps

**A**coustical ceiling tile is the most common installation method for the Qt emitter. However, optional mounting brackets allow Qt emitters to be attached to virtually any surface - beams, drywall, metal, wood and others. Additionally, with a color cap, Qt emitters can seamlessly blend in with any decor.

## Qt emitter specifications

- height:** 2.5" (6.35 cm)
- diameter:** 3.25" (8.3 cm)
- weight:** 5.6 oz (159 g)
- color:** white, black\* or custom\*
- wiring:** plenum rated  
CAT 3/5/5A/6 cables
- frequency response:**
  - sound masking:  
200 Hz to 5 kHz, 1/3<sup>rd</sup> OBs
  - paging and music:  
200 Hz to 12.8 kHz OBs
- SPL output:**  
28 - 58 dB at 10' (3.0 m) ceiling height  
(on a 10' (3.0 m) grid)

\*see black and custom color caps

### universal bracket (UB)



This enclosure is used for mounting the Qt emitter to a wood beams or cement ceilings. The bracket cylinder rotates in 45-degree increments for optimal sound dispersion. Available in white or black.

### beam bracket (BB)



This enclosure is used for mounting the Qt emitter to exposed I-beams. Available in white or black.

### conduit mount - drywall (CM)



This enclosure is ideal for mounting the Qt emitter into drywall/gypsum ceilings in areas requiring conduit mounting.

### drywall mount (DM)



This enclosure is used for mounting the Qt emitter into drywall/gypsum ceilings.

### plenum back can (PBC)



This enclosure is used for mounting the Qt emitter into acoustic ceiling tile in regions with special fire and/or conduit requirements.

### black & custom color caps



Qt emitter caps can be ordered to match your custom color or can be painted on site, making Qt the only sound masking system flexible enough to fit into any space while preserving the space's aesthetics.

# our customers

praise for the Qt Quiet Technology system

Cambridge Sound Management has the best sound masking system on the market and the best customer service in the industry. But don't take our word for it. Take a look at what our customers have to say.



Scan to read our case studies!

## Bank of America

*"The Bank of America National Helpline site in Boston houses over 200 associates. Even with all that talking, our work environment is private and productive, thanks to sound masking from Cambridge Sound Management. Their solution is straightforward and effective. I wouldn't open a call center without it."*

**Edward Klemm**  
**Vice President, National Helpline**  
**Bank of America**

## Autodesk®

*"The Employees were being distracted by conversations 60 feet away. When the system's on, speech becomes unintelligible at a distance of about 20 feet."*

**Charles Rechtsteiner**  
**Regional Facilities Manager**  
**Autodesk**



*"Employees and customers have noted a change in that the space is quieter with fewer distractions. This has not only improved employee productivity, but has also enhanced the customer experience."*

**John Isabell**  
**Sales Manager**  
**ifm Effector**

### our corporate customers include:

Clorox Company  
Dassault Systemes  
General Electric / GE Aviation  
Hasbro  
Microsoft  
Phillips 66  
Southwest Airlines

### our healthcare customers include:

Behavioral Health Network  
Chilton Hospital  
Harvard Medical Center  
Mercy Health System  
Spectrum Health System  
Tufts Health System  
Univ. of Colorado Hospital

### our financial customers include:

Citibank  
GE Capital  
Merrill Lynch  
Morgan Stanley  
TD Ameritrade  
US Bank  
Wells Fargo

## Williams

*"Libraries are supposed to be quiet, but whispers could be heard 40 feet away. With the help from Cambridge Sound Management, we now have a library that seems quieter and is still beautiful. We are delighted."*

**Bob Jarvis**  
**Buildings and Grounds Manager**  
**Williams College**



*"Once we installed the Qt Quiet Technology system, the results were nothing short of amazing. Our employees saw a dramatic difference in their ability to concentrate because the system effectively masked distracting conversations."*

**Michelle Kenworthy**  
**Real Estate Projects Manager**  
**Citadel Federal Credit Union**

## Wentworth-Douglass Hospital

*"The individual acoustical challenges in our open space areas and in our ten private practices are solved with a Qt system. In addition, the two audio inputs enable us to have full paging and music ability throughout the professional center. We were impressed with the low impact of the installation process. With the Qt system in place, there is less distraction from unwanted sounds and conversations. Patients and staff can now experience the positive ambiance we wanted to achieve through the open design concept, and we gained a greater level of patient satisfaction."*

**Alison Brisson**  
**Plant Operations Manager**  
**Wentworth-Douglas Professional Health Center**

### our government customers include:

- U. S. Department of Homeland Security
- U. S. General Services Administration
- U. S. Internal Revenue Service
- U. S. Social Security Administration
- U. S. Marine Corps
- National Institutes of Health
- National Geospatial Intelligence Agency

### our education customers include:

- Harvard University
- Ithaca College
- Massachusetts Institute of Technology
- Northeastern University
- Southern Illinois University Carbondale
- Suffolk University
- Dedham High School

### our retail customers include:

- Apple Inc.
- Costco
- Goodyear
- Harley Davidson
- Home Depot
- Petco
- Sun Trust

Are you ready to find out how a Qt sound masking system can improve comfort, productivity and privacy in your business?



Scan to request a quote!



[www.csmqt.com](http://www.csmqt.com)

800.219.8199 (Toll free within the US & Canada)

617.349.3779 (Outside US & Canada)

[info@csmqt.com](mailto:info@csmqt.com)

© 2013 Cambridge Sound Management, LLC. All Right Reserved. "Qt Quiet Technology", "Qt", "Qt 100", "Qt 200", and "Qt 600" are trademarks of Cambridge Sound Management, LLC. All other trademarks are trademarks and registered trademarks of their respective owners. All Specifications are subject to change. Visit [csmqt.com](http://csmqt.com) for latest specification information.

