

Memtech Acoustical, LLC

Your Source for Noise Control Solutions

Memtech Acoustical, LLC
2175 Avon Industrial Dr.
Rochester Hills, MI 48309
Phone: 248-289-1123
Toll Free: 877-606-3940
Fax: 248-289-6317

Sales@memtechacoustical.com


Product Information



www.memtechacoustical.com

Sonex Pyramid Panels

- Bold, geometric pattern
- Seamless installation
- Excellent acoustic control
- Panel size of 24" x 24" by 2", 3" or 4" thickness

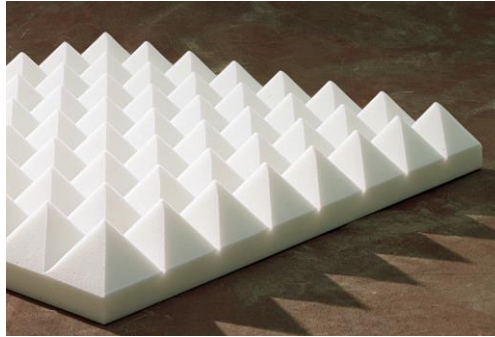

Applications:

- ✓ Displays, showrooms and museums
- ✓ Machine rooms or manufacturing areas
- ✓ Modern offices and building interiors
- ✓ Recreational facilities
- ✓ Recording studios and listening rooms
- ✓ Restaurants and cafeterias

SONEX Pyramid Panels offer outstanding acoustic control across all frequencies with Noise Reduction Coefficient (NRC) ranging from 0.75 to 1.05. The unique geometric design of these panels dramatically increases the panels' surface area, providing much more acoustic control than flat surfaces. SONEX Pyramid Panels are made from pinta's willtec® foam, which is Class 1 fire-rated according to ASTM E 84 for flame spread and smoke density. willtec natural also meets the corner burn test UL 1715.

SONEX Pyramid Panels, available in natural willtec, can be easily mounted to any wall or ceiling surface with pinta's acouSTIC water-based adhesive. Once installed, the 24" x 24" panels align to make an attractive, seamless pattern.

Physical Data—willtec® foam

Material	Open-cell melamine-based foam
Density	0.5 to 0.7 lbs./cubic ft. (ASTM D3574-77)
Long-Term Service Temperature	302° F
Fire Resistance	Class 1 per ASTM E 84 Meets UL 1715 (willtec natural)
Flame Spread per ASTM E 84	Natural: 5
Smoke Density per ASTM E 84	Natural: 50
Microbial Growth	Passes UL 181, section 11
Fungus Resistance	Rating 0 per ASTM G21
Finishes	Natural (white and light grey)

Sound Absorption

Finish	Thickness	Coefficients per ASTM C423-90a							Mounting Type
		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC	
Natural (white and grey)	2"	0.07	0.25	0.60	0.94	0.97	1.08	0.70	B
	3"	0.09	0.37	0.81	1.01	1.03	1.07	0.80	B
	4"	0.18	0.44	0.96	1.14	1.18	1.19	0.95	B