

# Memtech Acoustical, LLC

*Your Source for Noise Control Solutions*


Memtech Acoustical, LLC  
2175 Avon Industrial Dr.  
Rochester Hills, MI 48309  
Phone: 248-289-1123  
Toll Free: 877-606-3940  
Fax: 248-289-6317  
Sales@memtechacoustical.com

Product Information 

[www.memtechacoustical.com](http://www.memtechacoustical.com)

## Impaling Pins

- Must be applied to a clean, non-porous surface, which is free of all oil, film, dust, rust, etc.
- Not generally recommended on painted surfaces, drywall, or ceilings of metal buildings
- Best results are obtained when ambient temperature is above 40 degrees F at time of application
- Temperature range for the foam tape is -20 degrees to 180+ degrees F
- Loading should not exceed 3 lbs. per anchor (.75 lb./sq. inch)
- Base must be applied with firm pressure. Do not twist during application. Do not remove release (backing) paper until ready to use
- Insulation may be applied immediately after bond is made

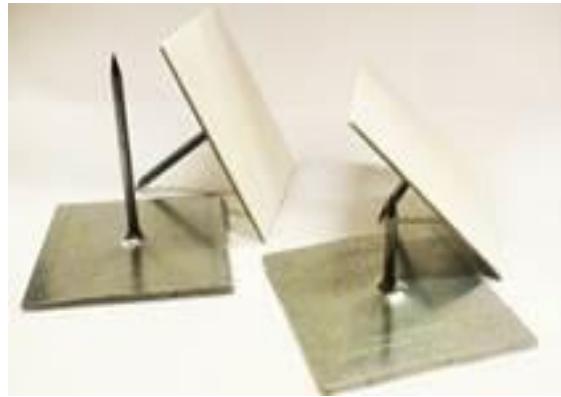

### Self-Stick Insulation Anchors (Hangers)

#### Materials

**Low Carbon Steel - PIN / Plate**

#### Mechanical Properties

**Low Carbon Steel - Plate**

Also available by special order in all Stainless Steel or all Aluminum.

#### Plating

Galvanized coating is standard. - PIN / Plate

#### Washers

Self-locking washers are available in a variety of sizes, shapes, and materials.

#### Size - D

12 GA (0.105") is standard.

Other sizes available by special order only.

#### Length - L

1", 1-5/8", 2", 2-1/2", 3-1/2", 4-1/2", 5-1/2", 6-1/2", 8" and 9" are standard.

Other lengths available by special order.

**Please click the Request Information button to configure your Self-Stick Insulation Anchors (Hangers).**

