

Memtech Acoustical, LLC

Your Source for Noise Control Solutions

Memtech Acoustical, LLC
2175 Avon Industrial Dr.
Rochester Hills, MI 48309
Phone: 248-289-1123
Toll Free: 877-606-3940
Fax: 248-289-6317

Sales@memtechacoustical.com

Product Information





www.memtechacoustical.com

Sonex Clean Products

- Washable, cleanable and durable
- Sound absorption to reduce reverberation or echo
- Easy-to-install ceiling tiles, wall panels and baffles
- willtec® core is Class 1 fire-rated

Applications:

- ✓ Gymsnasiums
- ✓ Multipurpose rooms
- ✓ Large classrooms or music rooms
- ✓ Manufacturing facilities
- ✓ Warehouses
- ✓ Aquatic Centers and indoor pools

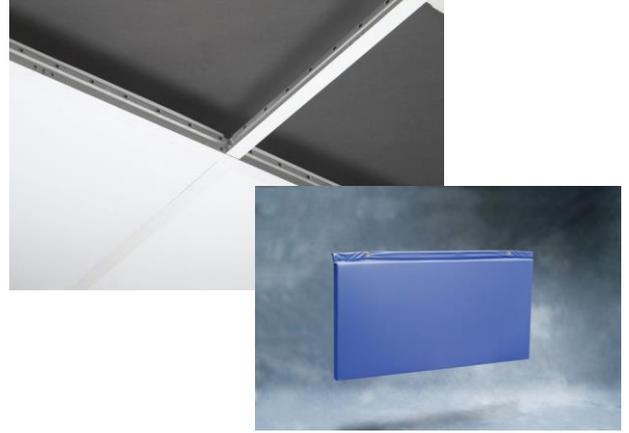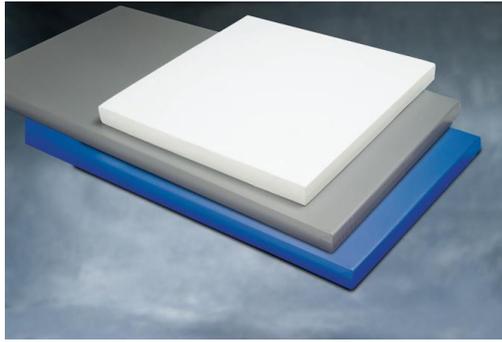

SONEX Clean products are designed for environments that require noise control with durable, washable and cleanable materials. The baffles, panels and ceiling tiles are ideal for use in a variety of applications, including bottling and food processing plants, clean rooms and food preparation areas. SONEX Clean products meet USDA/FDA requirements.

The products are fully encapsulated in FR taffeta vinyl for efficient cleaning and long, durable life. They offer excellent sound absorption to reduce reverberation or echo. The SONEX Clean line is made from pinta acoustic's willtec melamine foam core, which is ASTM E84 Class 1 fire-rated. Products are available in 17 standard colors.

Physical Data—willtec Core

Material ASTM G21	Open-cell melamine-based foam
Density	0.5 to 0.7 lbs./cu. ft. (ASTM D3574-77)
Long-Term Service Temperature	302°F
Fire Resistance	Class 1 per ASTM E 84 Meets UL 1715 (willtec natural)
Flame Spread per ASTM E 84	Natural: 5
Smoke Density per ASTM E 84	Natural: 50
Microbial Growth	Passes UL 181, section 11
Fungus Resistance	Rating 0 per

Physical Data—FR Taffeta Vinyl

Material ode	4.00 mil PVC film
Flammability	Meets California fire marshal requirements section 13115 CA Health and Safety C

Materials

- Made from pinta's Class 1 fire-rated willtec® melamine foam core
- Fully encapsulated in FR taffeta vinyl
- 17 standard colors

Installation/Size

Ceiling Tiles

(24" x 24" x 2" or 24" x 48" x 2")

- Drop into any pinta acoustic or standard ceiling grid system

Panels (24" x 48" x 2")

- Attach in seconds to wall and/or ceiling surface with pinta's acouSTIC water-based adhesive or hook and loop or other mechanical systems

Baffles (24" x 48" x 2")

- Equipped with grommets, easily installed on ceiling-mounted cables or chains

Sound Absorption—Ceiling Tiles

Test ASTM C423-07; Mounting Type E

Frequency (Hz)	2" Thickness
125	0.57
250	0.67
500	0.91
1000	0.90
2000	0.43
4000	0.19
NRC	0.75

Sound Absorption—Wall Panels

Test ASTM C423-07; Mounting Type A

Frequency (Hz)	2" Thickness
125	0.18
250	0.75
500	1.21
1000	0.82
2000	0.40
4000	0.25
NRC	0.80

Sound Absorption—Baffles

Sabins per Baffle per ASTM C423-07; Hanging Baffle

Frequency (Hz)	2" Thickness
125	1.88
250	5.23
500	10.33
1000	11.84
2000	5.33
4000	2.99
Average	8.20