

Sonex Plano Baffle Absorbers

- ✓ Virtually unlimited profile shapes and T-grid ceiling plans
- ✓ For retrofit and new construction
- ✓ Easy standard T-grid installation in crosshatch, straight line or other patterns
- ✓ Reduces noise, echo and sound reverberation
- ✓ Made from willtec foam
- ✓ Class 1 fire rated
- ✓ Available in natural white and grey and water-based acoustic coated finishes

SONEX® PLANO Absorbers provide exceptional sound absorption with virtually unlimited profile shapes and T-grid ceiling plans. Profiles include convex, concave, wedge and custom contours. The baffles are easy to suspend from a standard T-grid system in crosshatch, straight line or other patterns across the width or length of the ceiling for a signature design. These baffles reduce echo and sound reverberation in large open areas.



SONEX PLANO Absorber Material

- Made from pinta's WILLTEC® foam
- Natural white or light grey
- Water-based acoustic coating in standard, premium and custom colors for easy cleaning and durability
- Custom profile shapes available

Sizes

- Length: Up to 48 inches (1219 mm)
- Depth: 24 to 32 inches (610 to 813 mm)
- Thickness: 2 inches (51 mm)


Applications

- Large open areas
- Lobbies and entries
- Entertainment facilities
- Universities
- Cafeterias
- Manufacturing and assembly areas

Installation

- Follow manufacturer's instruction to install T-grids
- Slide T-rail into groove on the top of the baffle
- Clip into standard 15/16" (24 mm) T-grid

Ceiling Plan

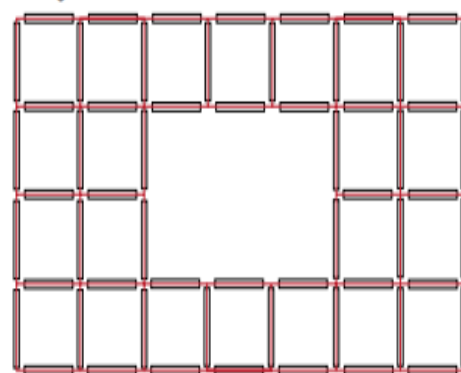

Physical Data—WILLTEC foam

Material	Open-cell melamine-based foam
Density	0.5 to 0.7 lbs./cu. ft. (ASTM D3574-77)
Long-Term Service Temperature	302°F (150°C)
Flame Spread and Smoke Density	Passes Class A per ASTM E 84 (all finishes) Meets UL 1715 (willtec natural) Passes CAN ULCS-102
Microbial Growth	Passes UL 181, section 11
Fungus Resistance	Rating 0 per ASTM G21
Toxicity	Passes University of Pittsburgh Toxicity of Smoke Emission test
Absorber Finishes	Natural white, grey or water-based acoustic coated, custom colors available

Sound Absorption

(In sabins) Test ASTM C423-90a

Frequency (Hz)	24 x 48 x 2 inches (610 x 1219 x 51 mm), Natural white
125	1.0
250	5.4
500	10.8
1K	16.3
2K	18.7
4K	24.0
Average sabines per baffle	12.7

Profile Shapes

